



(51) International Patent Classification⁷: **H04L 12/64**

(21) International Application Number:
PCT/EP2004/052339

(22) International Filing Date:
28 September 2004 (28.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03022177.4 30 September 2003 (30.09.2003) EP

(71) Applicant (for all designated States except US):
SIEMENS AKTIENGESELLSCHAFT [DE/DE];
Wittelsbacherplatz 2, 80333 München (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GERDING**,
Rolf-Dieter [DE/DE]; Stiftstrasse 86, 53225 Bonn
(DE). **GRANZER**, Hermann [DE/DE]; Lindenberg
177, 82343 Pöcking (DE). **HNYK**, Ruediger [DE/DE];
Geisbergstrasse 21, 86316 Friedberg (DE). **WIEDORN**,
Holger [DE/DE]; Schwanenweg 14, 53859 Niederkassel
(DE).


(74) Common Representative: **SIEMENS AKTIENGE-
SELLSCHAFT**; Postfach 22 16 34, 80506 München
(DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A CALL JUMP SYSTEM, METHOD & APPARATUS

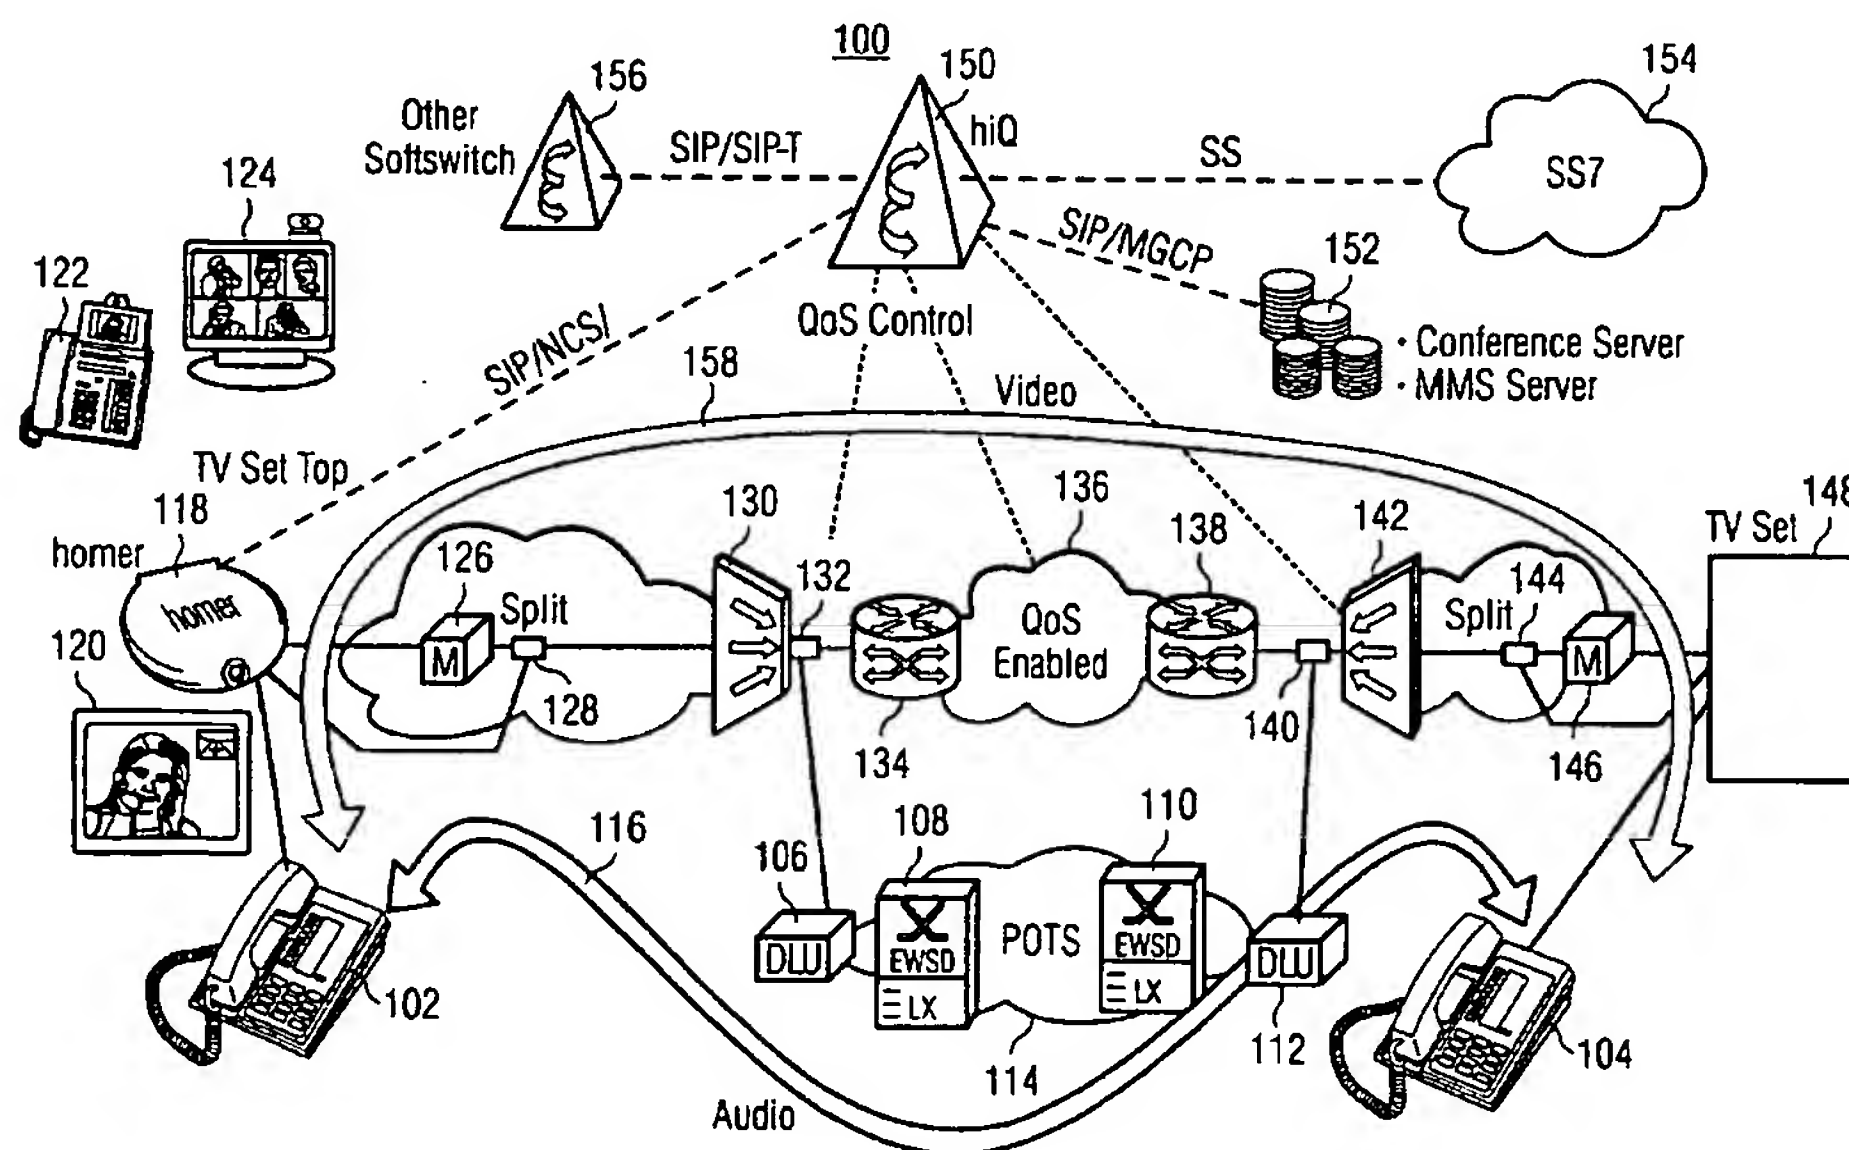

(57) Abstract: A call jump establishes a jump from a call of a traditional telephone carrier established with audio signals. When it is determined that -video should be added to the call, a packetized network is connected. The audio and video are transmitted over the packetized network. There is provided standard telephone equipment. A video enabled device is capable of rerouting the audio selectively to either the traditional telephone carrier or the packetized network. A packetizer packetizes the audio signals from the standard telephone equipment and the video.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.